
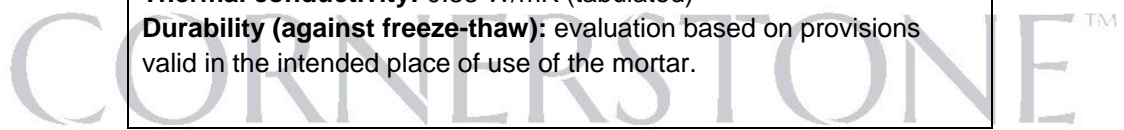


CE Mark

 -
Cornerstone, Brims Park, Old Callywith Road, Bodmin, Cornwall, PL31 2DZ 16
EN 998-1:2010 CLD30 Harbour Mix General purpose rendering mortar (GP) for external use Reaction to fire: Euroclass A1 Adhesion: 0.3 N/mm ² – Fracture pattern B Water absorption: 0.8 Kg/(m ² .min ^{0.5}) Water vapour diffusion coefficient: μ 15/35 (tabulated) Thermal conductivity: 0.83 W/mK (tabulated) Durability (against freeze-thaw): evaluation based on provisions valid in the intended place of use of the mortar.



PROTECTING THE PAST & PRESENT

Signed: *E. Walker*
Name: Mr Edward Walker
Position: Technical Manager
Date: 17/06/2018